


Differential Oscilloscope Probe DP3000 Series

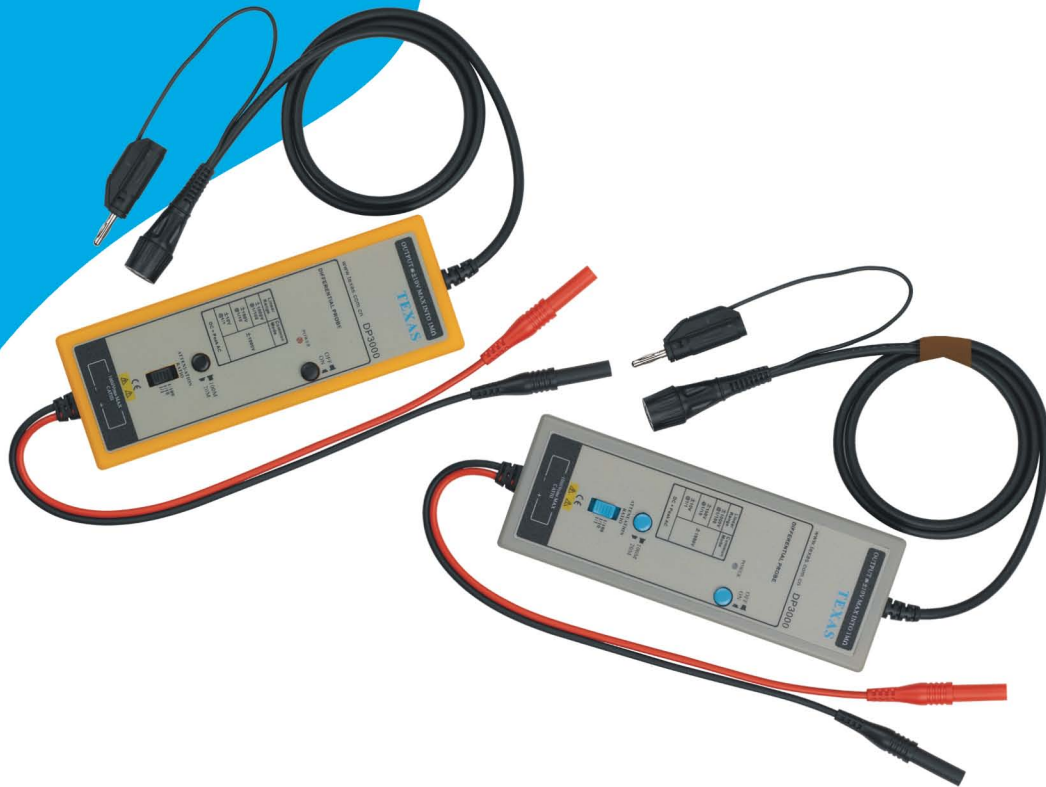

NEW

MODEL	DP3000	DP3001
Attenuation Ratio:	1/1, 1/10, 1/100	1/1, 1/10, 1/100
Bandwidth	DC to 50MHz(-3dB)	DC to 35MHz(-3dB)
Bandwidth limited	DC to 10MHz(-3dB)	
Accuracy	3%	3%
Rise time	7ns	10ns
	35ns(BWL)	
Input impedance	1/1, 1/10 10MOHM//5pF	1/1, 1/10 10MOHM//5pF
	1/100 11MOHM//5pF	1/100 11MOHM//5pF
Diff. DC-input Resistance	>=20MOHM	>=20MOHM
Max. Differential input voltage *	DC+AC 1/1 +/-10V	DC+AC 1/1 +/-10V
	1/10 +/-100V	1/10 +/-100V
	1/100 +/-1000V	1/100 +/-1000V
Max.Common mode voltage	1/1 +/-10V	1/1 +/-10V
	1/10 +/-100V	1/10 +/-100V
	1/100 +/-1000V	1/100 +/-1000V
Output	=<+/-10V	=<+/-10V
Output impedance	50OHM	50OHM
CMRR	1MHz>40dB	1MHz>40dB

The above specifications only for you reference.
All the specifications are subject to change without notice

TEXAS

SZ Tel: 0755-25096157/83318331 Fax: 0755-83103899
E-Mail: texas986@szonline.net

HONG KONG TEXAS CO., LTD

香港德州有限公司

[Http://www.texas.com.cn](http://www.texas.com.cn)

HK Tel: 00852-26714742 Fax: 00852-26728578
E-Mail: texas397@netvigator.com